

LVC MOS VCXO Specification Model V801



2111 Comprehensive Drive

Aurora, Illinois 60505

Phone: 630-851-4722

Fax: 630-851-5040

www.conwin.com

US Headquarters:

630-851-4722

European Headquarters:

+353-61-472221

Description:

The Connor-Winfield, RoHS compliant, V801 is a 3.3V Voltage Controlled Crystal Oscillator (VCXO) with LVC MOS output and enable/disable function. The V801 is designed for use with applications utilizing a PLL system requiring low jitter and tight frequency stability. The surface mount package is designed for high-density mounting and is optimum for mass production.



Features:

- 3.3 Vdc Operation
- Absolute Pull Range (APR): ± 50 ppm
- Temperature Range: 0 to 70°C
- Low Jitter: <1ps RMS
- LVC MOS Output
- 5x7 mm SMT Package
- High Input Resistance, Pad 1
- Tri-State Enable/Disable, Pad 2
- Tape and Reel Packaging
- RoHS Compliant / Lead Free

Absolute Maximum Ratings

Parameter	Minimum	Nominal	Maximum	Units	Notes
Storage Temperature	-40	-	85	°C	
Supply Voltage (Vcc)	-0.5	-	4.6	Vdc	
Control Voltage (Vc)	-0.5	-	Vcc + 0.5	Vdc	

Operating Specifications

Parameter	Minimum	Nominal	Maximum	Units	Notes
Center Frequency: (Fo)	27	-	130	MHz	
Frequency Tolerance	-20	-	20	ppm	1
Operating Temp Range:	0	-	70	°C	
Supply Voltage: (Vcc)	3.135	3.3	3.465	Vdc	
Supply Current : (Icc)	-	-	30	mA	
Jitter (Fo=77.76MHz)					
Period Jitter	-	3.0	5.0	ps RMS	
Integrated Phase Jitter	-	0.15	0.5	ps RMS	2
Typical SSB Phase Noise @ 77.76 MHz					
@ 10 Hz offset	-	-65	-	dBc/Hz	
@ 100 Hz offset	-	-95	-	dBc/Hz	
@ 1 KHz offset	-	-120	-	dBc/Hz	
@ 10 KHz offset	-	-140	-	dBc/Hz	
@ 100 KHz offset	-	-153	-	dBc/Hz	
@ 1 MHz offset	-	-160	-	dBc/Hz	
Start-Up Time	-	-	10	ms	

Input Characteristics

Parameter	Minimum	Nominal	Maximum	Units	Notes
Control Voltage Range (Vc)	0.3	1.65	3.0	Vdc	
Absolute Pull Range (APR)	± 50	-	-	ppm	3
Pull Slope	-	130	-	ppm/V	
Monotonic Linearity	-10	-	10	%	
DC Input Impedance	2M	-	-	Ohm	4
Modulation Bandwidth (3dB)	25	-	-	KHz	
Enable Input Voltage (High) (Vih)	2.4	-	-	V	5
Disable Input Voltage (Low) (Vil)	-	-	0.4	V	5

LVC MOS Output Characteristics

Parameter	Minimum	Nominal	Maximum	Units	Notes
Load	-	15	-	pF	
Voltage (High) Voh	2.4	-	-	V	
(Low) Vol	-	-	0.4	V	
Duty Cycle at 50% Level	45	50	55	%	
Rise / Fall Time: 20% to 80%	-	0.7	1.5	ns	

Notes:

1. Includes calibration @ 25°C, frequency stability vs. change in temperature, supply voltage and load variations, shock and vibration and 10 years aging, Vcc = 3.3 Vdc, Vc = 1.65 Vdc.
2. BW= 12 KHz to 20 MHz.
3. Absolute Pull Range (APR) is the minimum guaranteed pull range of the VCXO under all conditions over lifetime operation including calibration @ 25°C, frequency stability vs. the change in temperature, frequency vs. change in supply voltage, frequency vs. change in load, shock and vibration and 10 years aging. The APR is referenced to (Fo). Positive transfer function.
4. Measured from pin 1 to ground.
5. Oscillator output is enabled with no connection on pad 2.



Bulletin **VX653**

Page **1 of 2**

Revision **01**

Date **27 Aug 2015**


Package Characteristics

Package: Hermetically sealed ceramic surface mount package w/case ground metal cover


Environmental Characteristics

Vibration: Vibration per Mil Std 883E Method 2007.3 Test Condition A.
Shock: Mechanical Shock per Mil Std 883E Method 2002.4 Test Condition B.
Soldering Process: RoHS compliant lead free. See soldering profile on page 2.


Package Layout

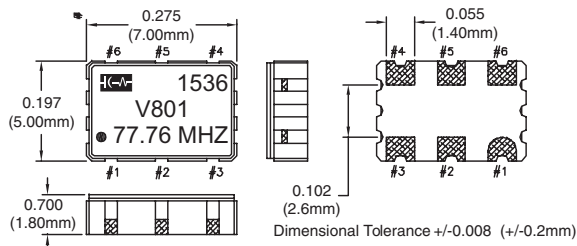


Typical Phase Noise

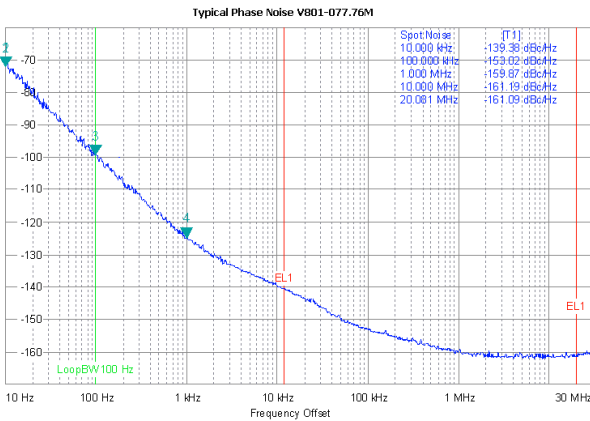

Test Circuit

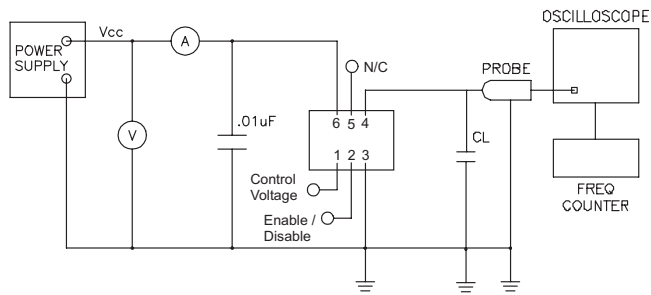


Tape and Reel Dimensions

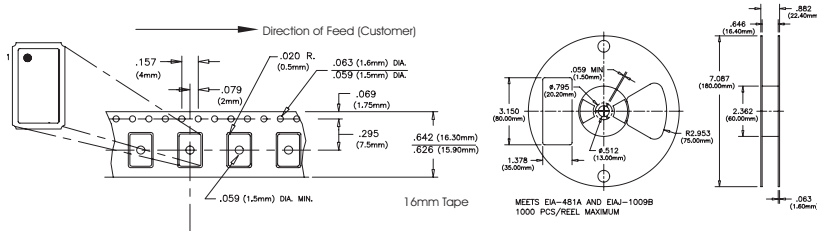

Ordering Information



Suggested Pad Layout

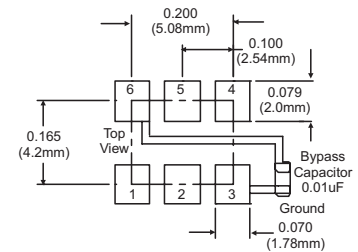


Pad Connections

- 1: Control Voltage (Vc)
- 2: Enable / Disable
- 3: Ground
- 4: Output Q
- 5: N/C
- 6: Supply Voltage (Vcc)


Enable / Disable Function

Function:	Outputs
High or Open	Enabled
Low	Disabled (High Impedance)

Output Waveform

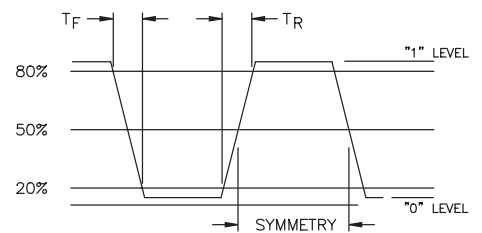

Solder Profile



Meets IPC/JEDEC J-STD-020C

Bulletin	VX653
Page	2 of 2
Revision	01
Date	27 Aug 2015